

扬州三菱电子有限公司
规格书

客户 _____

型号 MDQ35C

地址：江苏省扬州市南通西路6号

电话：0514-87344294

传真：0514-87310017

E-mail: SL you and me @ 163.com

<http://www.YZSLDZ.com>

MDQ35C 技术资料




V_{RSM} (V)	V_{RRM} (V)	I_O (AV) =35A (sin 180° Tc=100°C)
900	800	MDQ35C-8
1300	1200	MDQ35C-12
1700	1600	MDQ35C-16
1900	1800	MDQ35C-18
2100	2000	MDQ35C-20
2500	2400	MDQ35C-24

特点:

- 金属化三氧化二铝陶瓷绝缘,传热性好。
- 高温焊料焊接,有利于可靠性。

典型应用:

- 变频器
- 开关电源
- 电焊机

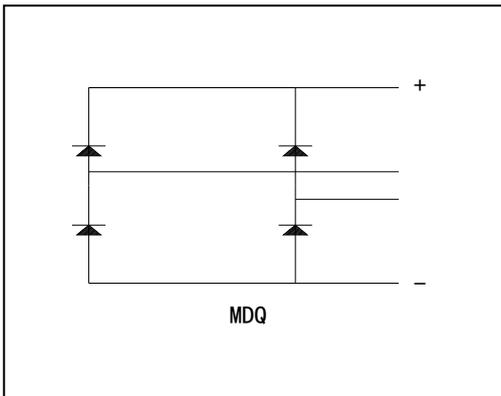

符号	测试条件	数值	单位
I_O (AV)	Tc=100°C, 三相全波	35	A
I_{FSM}	Ta=25°C, 10ms, 960V	350	A
I^2t	Ta=25°C, 10ms	0.005×350^2	A ² S
V_{FM}	$I_{FM}=52.5A, Ta=25°C$	1.10	V
V_{FO}	Tj=150°C	0.90	V
r_F	Tj=150°C	10	mΩ
I_{R1}	Ta=25°C, $V_R = V_{RSM}$	20	μA
I_{R2}	Ta=150°C, $V_R = V_{RRM}$	2	mA
Rjc		0.40	°C/W
Tstg		-40~+150	°C
Viso	Ac,50HZ,正弦波,1min	2500	V
Ms	散热器安装力矩	2.5	N•m
	电极端子焊接温	235°C/10s	

